



SPRAYMART

NORTH AMERICA'S LARGEST PRESSURE WASHER PARTS & ACCESSORIES RESOURCE

TABLE OF CONTENTS

■ COLD WATER PRESSURE WASHERS	5
■ PRESSURE WASHER ACCESSORIES	11
■ GUNS & LANCES	31
■ HOSES	42
■ COUPLERS, FITTINGS & FILTERS	52
■ NOZZLES	70
■ PUMPS & PUMP KITS	89
■ UNLOADERS, INJECTORS, VALVES & GAUGES	121
■ ENGINES, MOTORS & PULLEYS	146
■ BURNERS	154
■ ELECTRICAL COMPONENTS	170
■ CHASSIS COMPONENTS	184
■ CAR WASH BAY ACCESSORIES	187
■ AG SPRAY ACCESSORIES	194
■ SOFT WASH	201
■ INDEX	203
■ SPRAYMART TERMS & CONDITIONS	213

HD GAS PLUS SERIES



Redesigned for power, comfort, & convenience.

Clean faster and more comfortably with the new HD Series Gas Plus. We have enhanced our renowned modular aluminum frame and improved maneuverability by equipping it with larger wheels. Enjoy the convenience of an integrated wand holder and a handy hose hanger for tidy storage. Plus, the new vibration isolation power platform enhances stability and reduces vibration. With a comfortable grip and improved serviceability for easy maintenance, tackling cleaning jobs has never been more effortless. The redesigned HD Series Gas Plus is here. Let's get washing!

Features

- Up to 5.0 GPM, 4000 PSI with reliable Honda engine
- A variety of pump brands offered in belt or direct drive
- Effortlessly navigate terrain with larger wheels
- Integrated wand and hose storage
- Durable VRT3 unloader with bypass loop diverts water flow when trigger gun is not activated
- Compact footprint with aluminum frame - modular design - converts easily from cart to skid1



POWERED BY
HONDA

TECHNICAL DATA

Model	Part No.	GPM	PSI	Drive	Start	Pump	CC	Engine	Ship Wt. (lbs)	Ship Dimensions (L x W x H) Inches
HD 3.0/27 G	1.107-503.0	3.0	2700	Direct	Recoil	Kärcher LPP2535	196	Honda GX200	145	45.2 x 25.3 x 29.9
HD 3.5/35 G	1.107-504.0	3.5	3500	Direct	Recoil	Kärcher LPP3035	270	Honda GX270	166	45.2 x 25.3 x 29.9
HD 4.0/40 G	1.107-505.0	4.0	4000	Direct	Recoil	Kärcher LS4040	389	Honda GX390	185	45.2 x 25.3 x 29.9
HD 4.0/40 Ge	1.107-506.0	4.0	4000	Direct	Electric	Kärcher LS4040	389	Honda GX390	208	45.2 x 25.3 x 29.9
HD 3.0/27 G AR	1.107-513.0	3.0	2700	Direct	Recoil	AR RCV3G27D-F7	196	Honda GX200	180	45.2 x 25.3 x 29.9
HD 3.5/35 G AR	1.107-514.0	3.5	3500	Direct	Recoil	AR RRV3G36D	270	Honda GX270	213	45.2 x 25.3 x 29.9
HD 4.0/40 G AR	1.107-515.0	4.0	4000	Direct	Recoil	AR RRV4G40HD-F24	389	Honda GX390	228	45.2 x 25.3 x 29.9
HD 4.0/40 Ge AR	1.107-516.0	4.0	4000	Direct	Electric	AR RRV4G40HD-F24	389	Honda GX390	251	45.2 x 25.3 x 29.9
HD 3.0/27 G GP	1.107-523.0	3.0	2700	Direct	Recoil	GP EP1506G6	196	Honda GX200	228	45.2 x 25.3 x 29.9
HD 3.5/35 G GP	1.107-524.0	3.5	3500	Direct	Recoil	GP EP1309G8	270	Honda GX270	251	45.2 x 25.3 x 29.9
HD 4.0/40 G GP	1.107-525.0	4.0	4000	Direct	Recoil	GP EP1313G8	389	Honda GX390	138	45.2 x 25.3 x 29.9
HD 4.0/40 Ge	1.107-526.0	4.0	4000	Direct	Electric	GP EP1313G8	389	Honda GX390	166	45.2 x 25.3 x 29.9
HD 3.0/27 GB	1.107-507.0	3.0	2700	Belt	Recoil	Kärcher LBP3030R	196	Honda GX200	181	45.2 x 25.3 x 29.9
HD 3.5/35 GB	1.107-508.0	3.5	3500	Belt	Recoil	Kärcher LPP3035G1	270	Honda GX270	204	45.2 x 25.3 x 29.9
HD 4.0/40 GB	1.107-509.0	4.0	4000	Belt	Recoil	Kärcher LM3840R.3	389	Honda GX390	179	45.2 x 25.3 x 29.9
HD 4.0/40 GeB	1.107-510.0	4.0	4000	Belt	Electric	Kärcher LM3840R.3	389	Honda GX390	208	45.2 x 25.3 x 29.9
HD 5.0/30 GB	1.107-511.0	5.0	3000	Belt	Recoil	Kärcher LM4035R.3	389	Honda GX390	223	45.2 x 25.3 x 29.9
HD 5.0/30 GeB	1.107-512.0	5.0	3000	Belt	Electric	Kärcher LM4035R.3	389	Honda GX390	245	45.2 x 25.3 x 29.9
HD 3.0/27 GB AR	1.107-517.0	3.0	2700	Belt	Recoil	AR RRA35G30N	196	Honda GX200	223	45.2 x 25.3 x 29.9
HD 3.5/35 GB AR	1.107-518.0	3.5	3500	Belt	Recoil	AR RRA4G40N	270	Honda GX270	245	45.2 x 25.3 x 29.9
HD 4.0/40 GB AR	1.107-519.0	4.0	4000	Belt	Recoil	AR RRA4G40N	389	Honda GX390	143	45.2 x 25.3 x 29.9
HD 4.0/40 GeB	1.107-520.0	4.0	4000	Belt	Electric	AR RRA4G40N	389	Honda GX390	164	45.2 x 25.3 x 29.9
HD 5.0/30 GB	1.107-521.0	5.0	3000	Belt	Recoil	AR RRA55G30N	389	Honda GX390	178	45.2 x 25.3 x 29.9
HD 5.0/30 GeB	1.107-522.0	5.0	3000	Belt	Electric	AR RRA55G30N	389	Honda GX390	201	45.2 x 25.3 x 29.9
HD 3.0/27 GB GP	1.107-527.0	3.0	2700	Belt	Recoil	GP EP1513S17	196	Honda GX200	183	45.2 x 25.3 x 29.9
HD 3.5/35 GB GP	1.107-528.0	3.5	3500	Belt	Recoil	GP ES2010S	270	Honda GX270	212	45.2 x 25.3 x 29.9
HD 4.0/40 GB GP	1.107-529.0	4.0	4000	Belt	Recoil	GP ES2010S	389	Honda GX390	227	45.2 x 25.3 x 29.9
HD 4.0/40 GeB	1.107-530.0	4.0	4000	Belt	Electric	GP ES2010S	389	Honda GX390	249	45.2 x 25.3 x 29.9
HD 5.0/30 GB GP	1.107-531.0	5.0	3000	Belt	Recoil	GP ES2013S	389	Honda GX390	227	45.2 x 25.3 x 29.9
HD 5.0/30 GeB	1.107-532.0	5.0	3000	Belt	Electric	GP ES2013S	389	Honda GX390	249	45.2 x 25.3 x 29.9

See HD Series Gas for compatible accessories.

Warning: This product can expose you to chemicals including Lead and Disononyl Phthalate which are known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.gov.

Prices effective Jan. 1, 2025. Specifications, product descriptions, product availability, and pricing subject to change without notice.




SURFACE CLEANERS

SURFACE CLEANERS - A+ - 21" & 24"

Fast, even cleaning for large flat surfaces. Quickly cleans concrete, asphalt, and it removes grime and deposits from tennis courts, ramps and decks. Also great for factory and semi-trailer floors and drive-thrus. Cleans better and faster than a spray wand alone, with no striping. Use with hot or cold water and handles water up to 212°F to disinfect bathrooms and kitchens. Safety lock prevents accidental spraying.

- Two Spinning Nozzles 'Floats' Cleaner Above the Ground
- Circular Design for Zero Wall Clearance
- Stainless-steel Housing and Handle
- Universal Inlet Fitting Kit to Accommodate All Common Configurations
- Reduces Overspray on Walls, Landscaping and Operator
- Two #2.0, 1/8" Nozzles (for machines up to #4.0 nozzles), 25° Nozzles Rated up to 8.0 GPM and 4000 PSI
- Requires at Least 3.0 GPM, 2000 PSI



PART NO.	DESCRIPTION
8.753-572.0 	A+SC21 Rotary Surface Cleaner, 21"
8.753-573.0 	A+SC24 Rotary Surface Cleaner, 24"
8.753-597.0	Swivel for 21" and 24"
8.645-901.0	Spray Gun Kit for A+SC 21 & A+SC24 Includes: Screw M6X30, ¼" Quick Connect, Sleeve, Trigger Gun
8.645-905.0 	Caster Kit for A+SC 21 & A+SC24 Includes: Nut M6, Caster Spacer, Caster Wheel
8.757-726.0	Mount Plate Surface Cleaner

A+ 24" VENTURI RECOVERY SURFACE CLEANER WITH HOSE

The classic 24" A+ Surface Cleaner with the added Venturi pump water recovery system and a 16' water recovery hose that allows you to recover water without the need of a vacuum unit. Effectively transfers water and small debris (smaller than 3mm) to a drain or tank.



- Stainless-steel Housing and Handle
- Universal Inlet Fitting Kit to Accommodate All Common Configurations
- Two #2.0, 1/8" Nozzles (for machines up to #4.0 nozzles), 25° Nozzles Rated up to 8.0 GPM and 4000 PSI
- Requires at Least 3.0 GPM, 2000 PSI

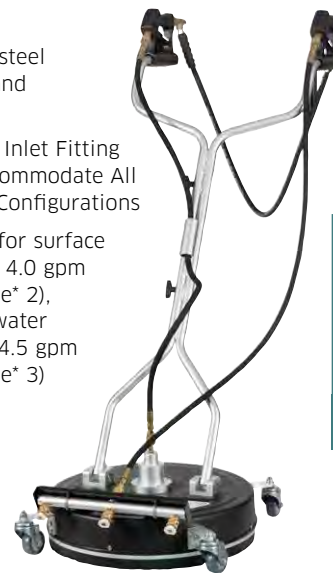


PART NO.	DESCRIPTION
9.116-064.0	Vac Recovery Surface Cleaner
9.117-613.0	Venturi Pump, Replacement Assembly for A+ 24" SC

NEW OFFERING LEGACY 20" SURFACE CLEANER WITH WATER BROOM



- Stainless-steel Housing and Handle
- Universal Inlet Fitting Kit to Accommodate All Common Configurations
- The GPM for surface cleaner is 4.0 gpm (2.0 nozzle* 2), GPM for water broom is 4.5 gpm (1.5 nozzle* 3)
- 4000 PSI



PART NO.	DESCRIPTION
9.119-167.0	20" Surface Cleaner with Water Broom

DUCT CLEANER



- PSI: 4000
- Max Temperature: 250°F
- 10.5 GPM
- Nozzles: #2.5 x 25°



PART NO.	DESCRIPTION
9.115-324.0	Adjustable 6", Temp. 250° max
9.115-325.0	Fixed 6"
9.115-326.0	Adjustable 3"
9.116-398.0	Replacement Nozzle 1/8" for adjustable 1/8"
9.116-399.0	Replacement Nozzle 1/8" for fixed 1/4"
9.116-400.0	Replacement Swivel for 3' and 6"

DUCT CLEANER



DUCT CLEANER

Designed as an accessory for use with high-pressure pumps or pressure washers. Cleans ducts, chutes, vents, restaurant exhausts, tanks, etc.

Self-rotating and feeding stainless-steel triple bearing system for constant easy turning. Nozzle holders are 1/8" NPTF. Nozzles are sold separately.

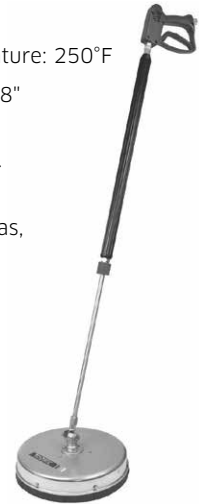


- PSI: 4000
- Max Temperature: 250°F
- Inlet Ports 3/8" NPTF
- Weight: 2 lbs.

12" SURFACE CLEANER

Designed for effortless cleaning of small areas, including walls and angled surfaces. High RPM swivel with integrated toggle joint and adjustable tension system.

- PSI: 4000
- Temperature: 250°F
- Weight: 9 lbs.
- 12" Stainless-Steel
- Includes All Items Pictured



PART NO.	DESCRIPTION	PSI
8.712-280.0	Duct Cleaner TXR-2s, Adjustable	4000
8.712-279.0	Duct Cleaner TXR-2s, Fixed	4000
8.749-911.0	Surface Cleaner, 12"	4000
8.712-285.0	Toggle Joint KGK	4000

SANDBLASTERS - INDUSTRIAL

For the extra-tough cleaning jobs, wet-sandblasting is the dust-free solution. The sandblasters attach to a hot or cold water pressure washer and, using a venturi, mixes sand or other abrasive media with the high-pressure spray to create enough cleaning power to strip paint off concrete and barnacles from a ship's hull. The sandblasting nozzle is made of tungsten carbide for long life. There are two models—a top-of-the-line steel pot with tight-fitting lid or with a probe only.

- Quick-connect coupler for ease in attaching sand probe or pot
- Valve for metering the flow of the media
- Tubed, pneumatic tires for easy maneuvering
- Rating: Super-duty
- Recommended Usage: Heavy
- Attach to any hot or cold water pressure washer with minimum volume of 4 GPM



8.904-472.0

PART NO.	DESCRIPTION
8.904-470.0	Sandblaster with Pot (Carbide)
8.904-472.0	Sandblaster with Probe (Carbide)

NOTE: Excluded from any dealer freight programs



8.904-470.0

HOSE REELS - LEGACY PIVOT & FIXED BASE



Legacy hose reels were designed for ease of use and durability in commercial pressure washer applications. Offering 100' and 200' reels in both a fixed base and 360 degree rotating base. The oversized reel holds the advertised length plus leaves additional space reducing the difficulty of reeling hose. The unique extended swivel improves the hose connection and reduces hose wear and stress.



Fixed Base Reel

Trailer Mount Reel

360° Pivot Reel

Bracket Sockets



Universal Mount

Skid Mount

Wall Mount

Base Mount

Non-Pivot Reel Brackets








Universal

90°

45°

Vertical

- PSI: 5000
- Temperature: 325°F
- 100' - 200' Fixed Base
- 100' - 200', 360° Rotating Base
- High-Pressure, Double-Seal Swivels
- Reels equipped for 3/8" hose. Easily convertible to 1/2" hose with the change to a 1/2" swivel
- 2-Year Warranty

PART NO.	DESCRIPTION
8.750-485.0	 Pivot Reel, 100' x 3/8"
8.750-482.0	 Pivot Reel, 200' x 3/8"
8.750-476.0	 Fixed Based, 100' x 3/8"
8.750-479.0	 Fixed Based, 200' x 3/8"
8.920-142.0	Hose Reel, Trailer Mount, 100'
8.920-143.0	Hose Reel, Trailer Mount, 200'
8.919-430.0	Universal Mount
8.919-794.0	Skid Mount
8.919-437.0	Wall Mount
8.919-434.0	Base Mount
8.919-072.0	Bracket, Universal
8.919-445.0	 Bracket, 90°
8.919-441.0	Bracket, 45°
8.919-448.0	Bracket, Vertical
9.121-043.0	Handle, Replacement

NOTE: Hose not included


HOSE REELS - LEGACY SWIVELS



- PSI: 5000
- Innovative Design
- Stainless-Steel Rotor
- Unique Dual Seal for Extra Long Life
- 2-Year Warranty
- O-Rings; BUNA-N



- PSI: 5000
- Limits Bend and Hose Stress
- Stainless-Steel Rotor
- Unique Dual Seal for Extra Long Life
- 2-Year Warranty
- O-Rings; BUNA-N

PART NO.	INLET X OUTLET
SWIVEL	
9.118-021.0	1/2" M x 3/8" F
8.776-003.0	 3/8" F x 1/2" F
9.118-023.0	3/8" M x 3/8" F
9.118-024.0	3/8" F x 3/8" F
9.118-025.0	1/2" M x 1/2" F
9.118-026.0	1/2" F x 1/2" F
9.118-027.0	3/8" M x 1/2" F
9.118-028.0	1/2" F x 3/8" F
UNIVERSAL REPAIR KIT	
8.776-001.0	

PART NO.	INLET X OUTLET
EXTENDED SWIVELS	
9.118-020.0	1/2" M x 3/8" F
9.118-029.0	1/2" F x 3/8" F
9.118-030.0	3/8" M x 3/8" F
9.118-031.0	3/8" F x 3/8" F
9.118-034.0	1/2" F x 1/2" F
9.118-035.0	1/2" M x 1/2" F
9.118-032.0	3/8" F x 1/2" F
9.118-033.0	3/8" M x 1/2" F
UNIVERSAL REPAIR KIT	
8.776-001.0	

NEW OFFERING LEGACY "BEST" SPRAY GUN 

Ergonomically designed to be the most comfortable gun on the market.



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 21 oz.



SCAN TO SEE IT IN ACTION!



PART NO.	DESCRIPTION
8.751-213.0	"Best" Spray Gun
8.701-673.0	Unitized Valve Kit

LEGACY "INDUSTRIAL" SPRAY GUN 

Featuring a comfortable grip to reduce user fatigue.



- PSI: 5000
- GPM: 10.4
- Temperature: 300°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 19.84 oz.

PART NO.	DESCRIPTION
8.751-214.0	 "Industrial" Spray Gun
8.751-119.0	 Valve Kit

MV925 TRIGGER GUN

Economical easy pull trigger gun.



- PSI: 4500
- GPM: 8
- Temperature: 320°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 16.08 oz.

PART NO.	DESCRIPTION
8.754-907.0	MV925

M407 TRIGGER GUN



- PSI: 4000
- GPM: 7
- Temperature: 250°F
- 3/8" FPT Inlet x 1/4" FPT Outlet
- Weight: 13.4 oz.

PART NO.	DESCRIPTION
8.750-247.0	M407 Trigger Gun

ECONOMY TRIGGER GUN 



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" Female Inlet x 1/4" Outlet
- Weight: 23 oz.
- Private Label this Gun
Ask your sales rep

PART NO.	DESCRIPTION
9.113-082.0	A+ Trigger Gun
9.113-100.0	Unitized Valve Kit

A+ RELAXED TRIGGER GUN 



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" Female Inlet x 1/4" Outlet
- Weight: 23 oz.
- Private Label this Gun
Ask your sales rep

PART NO.	DESCRIPTION
9.117-659.0	A+ Gun with Stainless Steel Swivel Inlet

A+ GUN WITH STAINLESS STEEL SWIVEL INLET 



- PSI: 5000
- GPM: 12
- Temperature: 300°F
- 3/8" Female Inlet x 1/4" Outlet
- Weight: 23 oz.
- Private Label this Gun
Ask your sales rep



SCAN TO SEE IT IN ACTION!

PART NO.	DESCRIPTION
9.117-524.0	A+ Relaxed Trigger Gun with Stainless Steel Swivel

DUAL LANCES

Dual lances allow for easy switching between high pressure cleaning and low pressure chemical application (chemical injector required). Stainless steel pipes give increased life when applying variable Ph products.

VP DUAL LANCE

Superlite stainless-steel with nozzle guard and 1/4" stainless-steel outlet tubing.



- PSI: 4000
- 1/4" stainless steel tubes
- Fully insulated
- Forged Brass Valve Body with stainless steel valve bushing

PART NO.	DESCRIPTION
8.711-308.0	S 41"

DUAL LANCES

Interpump Dual Lance. Excellent for downstream injector and zinc-plated for chemical resistance.



36" Standard Dual Lance
8.710-612.0

- PSI:4050
- PSI:4050
- PSI: 4050



36" Dual Vented Lance
9.114-032.0

Dual Lance	Deluxe Dual Lance	Dual Vented Lance
■ GPM: 10.5	■ GPM: 10.5	■ GPM: 10.5
■ Temp: 284°F	■ Temp: 284°F	■ Temp: 284°F
■ Side Handle Valve Adjustment	■ Side Handle Valve Adjustment	■ 1/4" QC Nozzle Holder
■ 1/4" Male Inlet	■ 1/4" Male Inlet	■ 1/4" Soap Nozzle included
■ 1/4" Dual Outlet	■ 1/4" Dual Outlet	■ 1/4" MPT inlet *(Does not include male inlet QC
	■ 1/4" QC Brass Coupler, Brass Soap Nozzle	

PART NO.	DESCRIPTION
DUAL LANCE	
8.710-612.0	36" Standard
8.710-621.0	72" Extended
DELUXE DUAL LANCE	
8.904-281.0	72" Deluxe Extended
DUAL VENTED LANCE	
9.114-032.0	36" Dual Vented
REPAIR KIT	
8.900-135.0	Valve Repair Kit

DUAL LANCES

Premium dual lance with stainless-steel inset.



AL344LS-VP Lance
8.710-722.0



AL 333 Basic Lance
8.710-724.0

AL 333 Basic Lance	AL344LS VP Lance
■ 3650 PSI	■ 4000 PSI
■ GPM: 10.5	■ GPM: 10.5
■ Temperature: 300°F	■ Temperature: 302°F
■ 1/4" Male Inlet	■ 1/4" Male Inlet
■ 1/4" F NPT Dual Outlets	■ Stainless Steel Seat & 40" Vented Grip
■ 40" Molded Grip	■ 1/4" Stainless-steel Tubes
■ 1/8" Zinc-plated Tubes	■ 1/4" & 1/8" F NPT Dual Outlets
	■ (QC nozzles not included)
	AL344LS VPKIT - Premium
	■ Includes: 1/4" QC & Soap Nozzle, Nozzle Protector and Valve Cover
	AL344LS VPKIT - Standard
	■ Nozzle Protector and Valve Cover only

PART NO.	DESCRIPTION
DUAL LANCE	
8.710-724.0	40" AL333 Basic Dual Lance
8.710-722.0	40" AL344LS-VPKIT Standard Dual Lance
8.904-360.0*	S 40" AL344LS-VPKIT Premium Dual Lance with 1/4" QC Brass Inlet Plug

REPAIR KIT	
8.720-548.0	AL333 Repair Kit
9.803-267.0	AL344 Repair Kit

*Model includes a hardened-steel QC inlet plug.







NOZZLE SIZE SELECTION CHART

Determine the nozzle size by the pressure washer's GPM @ PSI (gallons per minute @ a specific pounds per square inch). If the nozzle size is too small, your equipment can be damaged. If the nozzle size is too large, cleaning ability is compromised. Nozzle fan degree does not effect nozzle size selection.

STANDARD NOZZLE SIZE	HOLE SIZE	POUNDS PER SQUARE INCH (PSI)																
		500	750	1000	1250	1500	1750	2000	2250	2500	2750	3000	3250	3500	3750	4000	4500	5000
2	.034"/0.86mm	0.71	0.87	1.00	1.12	1.22	1.32	1.41	1.50	1.58	1.66	1.73	1.80	1.87	1.94	2.00	2.12	2.24
2.5	.042"/1.07mm	0.88	1.08	1.25	1.40	1.53	1.65	1.77	1.88	1.98	2.07	2.17	2.25	2.34	2.42	2.50	2.65	2.80
3	.043"/1.09mm	1.06	1.30	1.50	1.68	1.84	1.98	2.12	2.25	2.37	2.49	2.60	2.70	2.81	2.90	3.00	3.18	3.35
3.5	.048"/1.22mm	1.24	1.52	1.75	1.96	2.14	2.32	2.47	2.63	2.77	2.90	3.03	3.15	3.27	3.39	3.50	3.71	3.91
4	.052"/1.32mm	1.41	1.73	2.00	2.24	2.45	2.65	2.83	3.00	3.16	3.32	3.46	3.61	3.74	3.87	4.00	4.24	4.47
4.5	.055"/1.40mm	1.59	1.95	2.25	2.52	2.76	2.98	3.18	3.38	3.56	3.73	3.90	4.06	4.21	4.36	4.50	4.77	5.03
5	.057"/1.45mm	1.77	2.17	2.50	2.80	3.06	3.31	3.54	3.75	3.95	4.15	4.33	4.51	4.68	4.84	5.00	5.30	5.59
5.5	.06"/1.52mm	1.94	2.38	2.75	3.07	3.37	3.64	3.89	4.13	4.35	4.56	4.76	4.96	5.14	5.33	5.50	5.83	6.15
6	.062"/1.57mm	2.12	2.60	3.00	3.35	3.67	3.97	4.24	4.50	4.74	4.97	5.20	5.41	5.61	5.81	6.00	6.36	6.71
6.5	.064"/1.63mm	2.30	2.81	3.25	3.63	3.98	4.30	4.60	4.88	5.14	5.39	5.63	5.86	6.08	6.29	6.50	6.89	7.27
7	.067"/1.70mm	2.47	3.03	3.50	3.91	4.29	4.63	4.95	5.25	5.53	5.80	6.06	6.31	6.55	6.78	7.00	7.42	7.83
7.5	.070"/1.78mm	2.65	3.25	3.75	4.19	4.59	4.96	5.30	5.63	5.93	6.22	6.50	6.76	7.02	7.26	7.50	7.95	8.39
8	.072"/1.83mm	2.83	3.46	4.00	4.47	4.90	5.29	5.66	6.00	6.32	6.63	6.93	7.21	7.48	7.75	8.00	8.49	8.94
8.5	.074"/1.88mm	3.01	3.68	4.25	4.75	5.21	5.62	6.01	6.38	6.72	7.05	7.36	7.66	7.95	8.23	8.50	9.02	9.50
9	.076"/1.93mm	3.18	3.90	4.50	5.03	5.51	5.95	6.36	6.75	7.12	7.46	7.79	8.11	8.42	8.71	9.00	9.55	10.06
9.5	.078"/1.98mm	3.36	4.11	4.75	5.31	5.82	6.28	6.72	7.13	7.51	7.88	8.23	8.56	8.89	9.20	9.50	10.08	10.62
10	.080"/2.03mm	3.54	4.33	5.00	5.59	6.12	6.61	7.07	7.50	7.91	8.29	8.66	9.01	9.35	9.68	10.00	10.61	11.18
11	.083"/2.11mm	3.89	4.76	5.50	6.15	6.74	7.28	7.78	8.25	8.70	9.12	9.53	9.92	10.29	10.65	11.00	11.67	12.30
12	.087"/2.21mm	4.24	5.20	6.00	6.71	7.35	7.94	8.49	9.00	9.49	9.95	10.39	10.82	11.22	11.62	12.00	12.73	13.42
12.5	.089"/2.26mm	4.42	5.41	6.25	6.99	7.65	8.27	8.84	9.38	9.88	10.36	10.83	11.27	11.69	12.10	12.50	13.26	13.98
13	.091"/2.31mm	4.60	5.63	6.50	7.27	7.96	8.60	9.19	9.75	10.28	10.78	11.26	11.72	12.16	12.59	13.00	13.79	14.53
15	.096"/2.44mm	5.30	6.50	7.50	8.39	9.19	9.92	10.61	11.25	11.86	12.44	12.99	13.52	14.03	14.52	15.00	15.91	16.77
20	.109"/2.77mm	7.07	8.66	10.00	11.18	12.25	13.23	14.14	15.00	15.81	16.58	17.32	18.03	18.71	19.36	20.00	21.21	22.36
25	.125"/3.18mm	8.84	10.83	12.50	13.98	15.31	16.54	17.68	18.75	19.76	20.73	21.65	22.53	23.39	24.21	25.00	26.52	27.95
30	.141"/3.58mm	10.61	12.99	15.00	16.77	18.37	19.84	21.21	22.50	23.72	24.87	25.98	27.04	28.06	29.05	30.00	31.82	33.54
40	.156"/3.96mm	14.14	17.32	20.00	22.36	24.49	26.48	28.28	30.00	31.62	33.17	34.64	36.06	37.42	38.73	40.00	42.43	44.72
50	.172"/4.37mm	17.68	21.65	25.00	27.95	30.62	33.07	35.36	37.50	39.53	41.46	43.30	45.07	46.77	48.41	50.00	53.03	55.90
60	.188"/4.78mm	21.21	25.98	30.00	33.54	36.74	39.69	42.43	45.00	47.43	49.75	51.96	54.08	56.12	58.09	60.00	63.64	67.08

NOZZLE FAN SELECTION

Select the nozzle degree or spray angle, based on your application. Standard nozzle degrees - 0°, 15°, 25° and 40°. Using the wrong nozzle degree can damage the surface you are cleaning.

 <p>0° Red</p>	 <p>15° Yellow</p>	 <p>25° Green</p>	 <p>40° White</p>
<p>CUTTING NOZZLE Delivers a concentrated stream that can gouge or cut. It can cut stubborn stains from concrete and other hard surfaces.</p>	<p>CHISELING NOZZLE Working at a 45° angle, this nozzle works like a scraper, stripping paint, grease and grime from hard surfaces.</p>	<p>FLUSHING NOZZLE Most commonly used nozzle for cleaning dirt from siding, sidewalks and metal furniture as well as wet sweeping leaves.</p>	<p>WASH NOZZLE Wide spray to wash and rinse large areas quickly. Usually safe for most surfaces, including aluminum siding, windows and vehicles.</p>



ARE YOU A SPRAYMART PREFERRED CUSTOMER?

Spraymart Preferred Customers enjoy added benefits such as discount pricing, special promotions, and a personal Spraymart Account Manager. If you're interested in becoming a Spraymart Preferred Customer, call us and experience first rate customer service unmatched in the industry today.

SPRAYMART.COM



1-800-752-0177